



TOWNSHIP BUILDING
NILES, MI 49120

NILES TOWNSHIP
320 BELL RD
NILES, MI 491204063

Prepared By:

WILLIAM ENDER
Sales Representative
swrep6048@sherwin.com
(269) 876-6680



**SHERWIN
WILLIAMS.**

SCHEDULE

Exterior Finishes

SEALER FOR MASONRY

Finish: .01511633 - Seal-Krete® Waterproofing Sealer Clear

APPLY 2 COATS OF SEALER TO RAW BLOCK. LET DRY OVERNIGHT BETWEEN COATS AND BACK ROLL TO WORK MATERIAL INTO PORES OF BLOCK

EFIS SIDING

Primer: A24W01100 - Loxon® Masonry Coating Systems Conditioner White

AFTER POWER WASHING TO REMOVE ALL CHALK AND DIRT OFF BUILDING APPLY 1 COAT OF CONDITIONER

Finish: K43W00051 - Resilience® Exterior Acrylic Latex Satin Extra White

APPLY 2 COATS OF RESILIENCE OVER CONDITIONER

END OF SECTION



SURFACE PREPARATION

1) Previously Coated Surfaces

Maintenance painting will frequently not permit or require complete removal of all old coatings prior to repainting. However, all surface contamination such as oil, grease, loose paint, mill scale, dirt, foreign matter, rust, mold, mildew, mortar, efflorescence, and sealers must be removed to assure sound bonding to the tightly adhering old paint. Glossy surfaces of old paint films must be clean and dull before repainting. Thorough washing with an abrasive cleanser will clean and dull in one operation, or, wash thoroughly and dull by sanding. Spot prime any bare areas with an appropriate primer.

Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system. Check for compatibility by applying a test patch of the recommended coating system, covering at least 2 to 3 square feet. Allow to dry one week before testing adhesion per ASTM D3359. If the coating system is incompatible, complete removal is required.

2) Power Tool Cleaning to Bare Metal

Metallic surfaces that are prepared according to this specification, when viewed without magnification, shall be free of all visible oil, grease, dirt, dust, mill scale, rust, paint, oxide corrosion products, and other foreign matter. Slight residues of rust and paint may be left in the lower portions of pits if the original surface is pitted. Prior to power tool surface preparation, remove visible deposits of oil or grease by any of the methods specified in SSPC-SP1, Solvent Cleaning, or other agreed upon methods. For complete instructions, refer to Steel Structures Paint Council Surface Preparation Specification No.11. (SSPC-SP11)

3) Stucco

Must be clean and free of any loose stucco. If recommended procedures for applying stucco are followed, and normal drying conditions prevail, the surface may be painted in 30 days. The pH of the surface should be between 6 and 9, unless the products to be used are designed to be used in high pH environments such as Loxon.

END OF SPECIFICATION

Data Pages



**SHERWIN
WILLIAMS.**



108.20A

LOXON®
Conditioner

A24W01100 Guide Coat White
A24V01100 Clear

As of 12/07/2015, Complies with:		
OTC	Yes	LEED® 09 CI Yes
SCAQMD	Yes	LEED® 09 NC Yes
CARB	Yes	LEED® 09 CS Yes
CARB SCM 2007	Yes	LEED® H Yes
MPI		NGBS Yes

CHARACTERISTICS

Loxon Conditioner is a 100% acrylic emulsion conditioner that will penetrate and seal interior and exterior surfaces and bond light chalk to the surface. With excellent alkali and efflorescence resistance, this sealer allows new concrete, stucco, and other cementitious surfaces to be coated prior to a 30-day cure, and will adhere to new or existing concrete with a pH of 6 to 13.

Color: Guide-Coat White & Clear

Coverage: 200-300 sq ft/gal

Drying Time, @ 77°F, 50% RH:

Drying and recoat times are temperature, humidity and film thickness dependent.

Touch: 30 minutes

Tack free: 1 hour

Recoat: 3 hours

Flash Point: N/A

Tinting with CCE:

Requires ColorCast Ecotoner colorant for tinting. If desired, up to 1 oz per gallon of ColorCast Ecotoner colorant can be used to approximate the topcoat color. Check color before use.

Vehicle Type: Proprietary Acrylic

Guide Coat White A24W01100

VOC (less exempt solvents):

<50 g/L; <0.42 lb/gal

As per 40 CFR 59.406 and SOR/2009-264, s.12

White

Volume Solids: 18 ± 2%

Weight Solids: 24 ± 2%

Weight per Gal: 8.92 lb

Clear A24V01100

VOC (less exempt solvents):

<50 g/L; <0.42 lb/gal

As per 40 CFR 59.406 and SOR/2009-264, s.12

Clear

Volume Solids: 16 ± 2%

Weight Solids: 17 ± 2%

Weight per Gal: 8.44 lb

SPECIFICATION

Masonry, Concrete, Stucco, Block

1 ct. Loxon Conditioner

2 cts. Appropriate architectural topcoat

For maximum resistance to efflorescence, you must topcoat with one of the Loxon or Loxon XP Coatings.

On exterior applications, Loxon Conditioner must be topcoated within 7 days or the surface may need to be re-cleaned.

If the surface requires a full bodied prime /block filler coat rather than a thin penetrating sealer, use Loxon Concrete & Masonry Primer or Loxon Block Surfacer.

For use on these surfaces:

- Concrete
- Concrete Block
- Brick
- Stucco
- Fiber Cement Siding
- Mortar
- EIFS Exterior Wall Cladding

SURFACE PREPARATION

WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (**NIOSH** approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.

New and Previously Painted

Remove all surface contamination (peeling paint, heavy chalk, efflorescence, laitance, concrete dust, etc.) by washing or pressure washing with an appropriate cleaner, rinse thoroughly and allow to dry. Existing peeled or checked paint should be scraped and sanded to a sound surface. Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system.

Masonry/Concrete/Stucco & Block

Remove all dirt, dust, grease, oil, loose particles, laitance, foreign material, and form release and curing agents. Concrete and mortar must be cured at least 7 days at 75°F. Fill bugholes, air pockets, cracks, and other voids with an elastomeric patch or sealant. Masonry surfaces must be dry, 15% or less of water and within a pH range of 6 to 13.

Brick

Must be free of dirt, loose and excess mortar, and foreign material. All brick should be allowed to weather for at least one year followed by wire brushing to remove efflorescence. Treat the bare brick with one coat of Loxon Conditioner.



LOXON®
Conditioner

A24W01100 Guide Coat White
A24V01100 Clear

<u>SURFACE PREPARATION</u>	<u>APPLICATION</u>	<u>CAUTIONS</u>
<p>Mildew Prior to attempting to remove mildew, it is always recommended to test any cleaner on a small, inconspicuous area prior to use. Bleach and bleaching type cleaners may damage or discolor existing paint films. Bleach alternative cleaning solutions may be advised. Mildew may be removed before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. Do not add detergents or ammonia to the bleach/water solution.</p>	<p>Do not build a surface glaze. Do not apply to a damp surface. Do not apply over heavy chalk. Do not apply if the surface temperature is below 50°F, when rain is expected within 3 hours, or when the relative humidity is 90% or more.</p> <p>No reduction necessary.</p> <p>Brush Use a nylon/polyester or foam brush.</p> <p>Roller Use a 3/8" to 3/4" nap synthetic cover.</p> <p>Spray—Airless Pressure..... 700-1000 psi Tip..... .015" - .019"</p> <p><u>CLEANUP INFORMATION</u></p> <p>Clean spills, spatters, hands and tools immediately with soap and warm water. After cleaning, flush spray equipment with compliant cleanup solvent to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using solvents.</p>	<p>Protect from freezing. Not for use on floors.</p> <p>Use only with adequate ventilation. To avoid overexposure, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Avoid contact with eyes and skin. Wash hands after using. Keep container closed when not in use. Do not transfer contents to other containers for storage. FIRST AID: In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call medical attention immediately. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN.</p> <p>HOTW 12/07/2015 A24W01100 09 00 SP, FRC</p> <p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Sherwin-Williams representative or visit www.paintdocs.com to obtain the most current version of the PDS and/or an SDS.</p>



**SHERWIN
WILLIAMS.**

102.18

RESILIENCE®
Exterior Latex
Satin
K43 Series

As of 4/12/2016, Complies with:			
OTC	Yes	LEED® 09 NC CI	N/A
SCAQMD	Yes	LEED® 09 CS	N/A
CARB	Yes	LEED® 09 H	N/A
CARB SCM 2007	Yes	LEED® v4 Emissions	N/A
MPI	Yes	LEED® v4 VOC	Yes

<u>CHARACTERISTICS</u>	<u>SPECIFICATIONS</u>	<u>SURFACE PREPARATION</u>																					
<p>Resilience Exterior is a high quality exterior finish with MoistureGuard™ Technology for excellent early moisture resistance. This product, which has improved resistance to early dirt pick up, is recommended for use on aluminum and vinyl siding, wood siding, clapboard, shakes, shingles, plywood, masonry, and metal down to a surface and air temperature of 35°F.</p> <p>VinylSafe™ Color Technology allows the use of many darker colors on vinyl siding that cannot be made in most other coatings.</p> <p>Color: Most colors To optimize hide and color development, always use the recommended P-Shade primer</p> <p>Coverage: 350 - 400 sq ft/gal @ 4 mils wet; 1.6 mils dry</p> <p>Drying Time, @ 50% RH: @ 35-45°F @ 45°F + Touch: 2 hour 2 hours Recoat: 24-48 hours 4 hours</p> <p><small>Drying and recoat times are temperature, humidity, and film thickness dependent</small></p> <p>Flash Point: N/A</p> <p>Finish: 10-20 units @ 60°</p> <p>Tinting with CCE:</p> <table border="1"> <thead> <tr> <th>Base</th> <th>oz/gal</th> <th>Strength</th> </tr> </thead> <tbody> <tr> <td>Extra White</td> <td>0-6</td> <td>Sher-Color</td> </tr> <tr> <td>Deep Base</td> <td>4-12</td> <td>Sher-Color</td> </tr> <tr> <td>Ultra Deep</td> <td>4-12</td> <td>Sher-Color</td> </tr> <tr> <td>Light Yellow</td> <td>0-12</td> <td>Sher-Color</td> </tr> <tr> <td>Primary Red</td> <td>0-12</td> <td>Sher-Color</td> </tr> <tr> <td>Vivid Yellow</td> <td>0-12</td> <td>Sher-Color</td> </tr> </tbody> </table> <p>Vehicle Type: 100% Acrylic K43W00051</p> <p>VOC (less exempt solvents): <50 g/L; <0.42 lb/gal <small>As per 40 CFR 59.406 and SOR/2009-264, s.12</small></p> <p>Volume Solids: 39 ± 2%</p> <p>Weight Solids: 52 ± 2%</p> <p>Weight per Gallon: 10.59 lb</p> <p>Water Vapor Permeance Based on ASTM D 1653 22.0 perms</p> <p>Mildew Resistant This coating contains agents which inhibit the growth of mildew on the surface of this coating film.</p>	Base	oz/gal	Strength	Extra White	0-6	Sher-Color	Deep Base	4-12	Sher-Color	Ultra Deep	4-12	Sher-Color	Light Yellow	0-12	Sher-Color	Primary Red	0-12	Sher-Color	Vivid Yellow	0-12	Sher-Color	<p>Aluminum & Aluminum Siding¹ 2 cts. Resilience Exterior Latex</p> <p>Concrete Block, CMU, Split face Block 1 ct. Loxon Block Surfacers 2 cts. Resilience Exterior Latex</p> <p>Brick 1 ct. Loxon Conditioner² 2 cts. Resilience Exterior Latex</p> <p>Cement Composition Siding/Panels 1 ct. Loxon Concrete & Masonry Primer/Sealer² or Loxon Conditioner² 2 cts. Resilience Exterior Latex</p> <p>Galvanized Steel¹ 2 cts. Resilience Exterior Latex</p> <p>Stucco, Cement, Concrete 1 ct. Loxon Concrete & Masonry Primer/Sealer² 2 cts. Resilience Exterior Latex</p> <p>Plywood 1 ct. Exterior Latex Wood Primer 2 cts. Resilience Exterior Latex</p> <p>Steel¹ 1 ct. All Surface Enamel Primer² 2 cts. Resilience Exterior Latex</p> <p>Vinyl Siding 2 cts. Resilience Exterior Latex</p> <p>Wood, Composition Board 1 ct. Exterior Oil-Based Wood Primer 2 cts. Resilience Exterior Latex</p> <p>¹ On large expanses of metal siding, the air, surface, and material temperatures must be 50°F or higher. ² Not for use at temperatures under 50°F. See specific primer label for that product's application conditions.</p> <p>Other primers may be appropriate.</p> <p>When repainting involves a drastic color change, a coat of primer will improve the hiding performance of the topcoat color.</p>	<p>WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.</p> <p>Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull. Seal stains from water, smoke, ink, pencil, grease, etc. with the appropriate primer/sealer. Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system.</p> <p>Aluminum and Galvanized Steel Wash to remove any oil, grease, or other surface contamination. All corrosion must be removed with sandpaper, wire brush, or other abrading method.</p> <p>Cement Composition Siding/Panels Remove all dirt, dust, grease, oil, loose particles, laitance, foreign material, and peeling or defective coatings. Allow the surface to dry thoroughly. If the surface is new, test it for pH, if the pH is higher than 8, prime with Loxon Concrete & Masonry Primer/Sealer.</p> <p>Caulking Gaps between windows, doors, trim, and other through-wall openings can be filled with the appropriate caulk after priming the surface.</p>
Base	oz/gal	Strength																					
Extra White	0-6	Sher-Color																					
Deep Base	4-12	Sher-Color																					
Ultra Deep	4-12	Sher-Color																					
Light Yellow	0-12	Sher-Color																					
Primary Red	0-12	Sher-Color																					
Vivid Yellow	0-12	Sher-Color																					



RESILIENCE®

Exterior Latex Satin K43 Series

<u>SURFACE PREPARATION</u>	<u>SURFACE PREPARATION</u>	<u>CAUTIONS</u>
<p>Masonry, Concrete, Cement, Block All new surfaces must be cured according to the supplier's recommendations—usually about 30 days. Remove all form release and curing agents. Rough surfaces should be filled to provide a smooth surface. If painting cannot wait 30 days, allow the surface to cure 7 days and prime the surface with Loxon Concrete & Masonry Primer/Sealer. Cracks, voids, and other holes should be repaired with an elastomeric patch or sealant.</p> <p>Steel Rust and mill scale must be removed using sandpaper, steel wool, or other abrading method. Bare steel must be primed the same day as cleaned.</p> <p>Stucco Remove any loose stucco, efflorescence, or laitance. Allow new stucco to cure at least 30 days before painting. If painting cannot wait 30 days, allow the surface to dry 7 days and prime with Loxon Concrete & Masonry Primer/Sealer. Repair cracks, voids, and other holes with an elastomeric patch or sealant.</p> <p>Vinyl Clean the surface thoroughly by scrubbing with warm, soapy water. Rinse thoroughly, primer with appropriate primer. Do not paint vinyl with any color darker than the original color unless the paint system features VinylSafe™ Color Technology. Painting with darker colors that are not VinylSafe™ may cause vinyl to warp. Follow all painting guidelines of the vinyl manufacturer when painting. Deviating from the manufacturer's painting guidelines may cause the warranty to be voided.</p> <p>Wood, Plywood, Composition Board Clean the surface thoroughly then sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth. All patched areas must be primed. Knots and some woods, such as redwood and cedar, contain a high amount of tannin, a colored wood extract. If applied to these bare woods, it may show some staining. If staining persists, spot prime severe areas with 1 coat of Exterior Oil-Based Wood Primer prior to using.</p>	<p>Mildew Prior to attempting to remove mildew, it is always recommended to test any cleaner on a small, inconspicuous area prior to use. Bleach and bleaching type cleaners may damage or discolor existing paint films. Bleach alternative cleaning solutions may be advised. Mildew may be removed before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. Do not add detergents or ammonia to the bleach/water solution.</p> <p style="text-align: center;"><u>APPLICATION</u></p> <p>When the air temperature is at 35°F, substrates may be colder; prior to painting, check to be sure the air, surface, and material temperature are above 35°F and at least 5°F above the dew point. Avoid using if rain or snow is expected within 1-1½ hours. Do not apply at air or surface temperatures below 35°F or when air or surface temperatures may drop below 35°F within 48 hours. No reduction necessary.</p> <p>Brush - Use a nylon/polyester brush. Roller - Use a 3/8" - 3/4" nap synthetic cover. Spray—Airless Pressure..... 2000 psi Tip..... .015"-.019"</p> <p style="text-align: center;"><u>CLEANUP INFORMATION</u></p> <p>Clean spills, spatters, hands and tools immediately with soap and warm water. After cleaning, flush spray equipment with compliant clean up solvent to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using solvents. Do not pour unused contents down the drain. Consult with local authorities for method of disposal and recycling.</p>	<p>For exterior use only. Protect from freezing. Non-photochemically reactive.</p> <p>Before using, carefully read CAUTIONS on label.</p> <p>HOTW 04/12/2016 K43W00051 29 39 Viet, FRC, SP, KOR</p> <p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Sherwin-Williams representative or visit www.paintdocs.com to obtain the most current version of the PDS and/or an SDS.</p>

SEAL KRETE

ORIGINAL

WATERPROOFING PRIMER/SEALER

PRODUCT
DATA SHEET

DESCRIPTION: Penetrating clear satin primer/sealer primarily for vertical surfaces; water-based acrylic, low odor and low VOC.

Typical Uses:

- ✓ Seal brick, stucco & concrete
- ✓ Rejuvenate old brick & plaster
- ✓ Brighten aluminum siding
- ✓ Prime vinyl siding
- ✓ Bind chalky surface
- ✓ Paint additive to extend life & coverage
- ✓ Buffer pH in hot cement
- ✓ Dustproofing and priming floors prior to painting

Important: Read all directions thoroughly. Recommended: Wear gloves and safety glasses.

SURFACE PREP*: Surface must be clean and dry. Remove loose paint and excessive chalk. Repair cracks and surface breaks. Cover windows, doors, etc. and use caution when applying on windy days.

APPLICATION: Read "LIMITATIONS" section before use. This sealer is ready to use; do not dilute. Apply with a brush, roller or sprayer (garden or airless). Backroll spray applications to ensure penetration. Apply at least two coats, allowing two hours dry time between coats. Remove any overspray immediately with water. Note: Sealer goes on milky white but dries clear.

COVERAGE: 80–300 sq.ft. per gal., depending on surface porosity. Second coat application is 50% greater. Two coats are required for waterproofing bare, vertical concrete.

DRY TIME: 2–4 hours, depending on temperature and humidity.

TOPCOATING: May be topcoated with latex, oil-based or elastomeric coating when dry.

TINT LIMITS: Up to 4 oz. colorant per gallon.

PAINT ADDITIVE: 4–8 oz. of SEAL-KRETE Original can be mixed with one gallon of latex paint to improve spread rate.

CLEAN-UP & STORAGE: Clean all tools immediately after use with soap and water. Store unused product in a dry place above 32°F (0°C). KEEP FROM FREEZING.

LIMITATIONS: Use on above grade vertical surfaces or as a primer on horizontal surfaces – not for below grade use. Do not apply if rain is expected within 12 hours or if temperatures fall below 50°F within 24 hours of application. Do not use on swimming pools, bird baths, water features, cedar, redwood or in areas where hydrostatic pressure is likely to develop. Do not use on very porous substrates like low density, decorative block (use SEAL-KRETE Heavy-Duty instead).

**Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or www.epa.gov/lead.*

CAUTION: Avoid contact with eyes and prolonged contact with skin. Do not ingest. In case of eye contact, flush thoroughly with water. For skin contact, wash with soap and water. If swallowed, do not induce vomiting. Drink 1–2 glasses of water and get medical attention.
KEEP OUT OF REACH OF CHILDREN.

THE MOST VERSATILE WATERPROOFING PRIMER/SEALER AVAILABLE

STUCCO	BRICK
BLOCK	SIDING
VINYL	CONCRETE



Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (W x D x H)	Cube / Wt. (cubic ft / lbs)	Carton Qty	Pallet Qty
Original	100001	1 gallon	0 15944 10001 3	1 00 15944 10001 0	15 x 9.5 x 13	1.07 / 36.43	4	36 cs
Original	100005	5 gallon	0 15944 10005 1	–	–	1.30 / 44.92	1	36 ea

SEAL KRETE

ORIGINAL

WATERPROOFING PRIMER/SEALER

- BEST DURABILITY
- INTERIOR/EXTERIOR USE
- FOR COATED & UNCOATED
- VERTICAL SURFACES

ASTM / FEDERAL TEST STANDARDS

SEAL-KRETE Original meets or exceeds:

- ASTM E-514-74 Water Permeance of Masonry (62 mph wind driven rain test)
- ASTM D-1653 Moisture Vapor Transmission
- ASTM D-3960 VOC Compliant (less than 50 g per liter)
- Federal Specification TT-P-0035 for Water Permeability (98 mph wind driven rain test)
- Meets USDA criteria for a structural surface coating that may come in contact with food.
- OTC-compliant

LIIQUID PROPERTIES

Solids: 10%

Proprietary Acrylic Resin

Water Based

Odor: Low

Appearance: Milky White, Dries Clear

VOC < 10 g/L – EPA Method 24 – Waterproofing Sealer Category

COVERAGE GUIDELINES

	Material Coverage Approx. sq. ft./gal.
Stucco/Simulated Brick	150
Concrete Slab/Tilt-ups	175
Concrete Blocks	80
Brick	125
Wood Fencing	175
Aluminum Siding	300
Galvanized Metal	300
Adobe	100
Chalky Surfaces	300

Note: Actual coverage will vary depending on porosity of surface. Use a high-solids formula, like SEAL-KRETE Heavy Duty, for low density, decorative block (split-face/fluted block).

LIMITED 5-YEAR WARRANTY: A limited 5-year warranty is available on the quality and performance of this product on a per job basis. Contact our technical service department for details on this warranty program. Otherwise, manufacturer/seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of SEAL-KRETE product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.




TECHNICAL SUPPORT: For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am–5:00 pm EST) or visit our website at www.seal-krete.com.

SEALS & PROTECTS

BINDS PAINTS

STRENGTHENS MORTAR JOINTS

REVITALIZES FADED COLOR

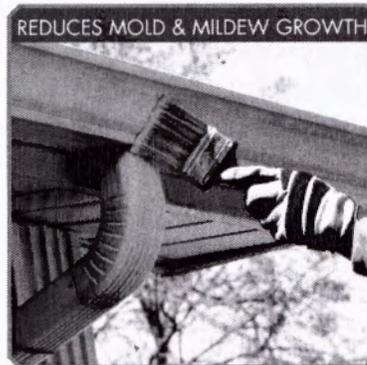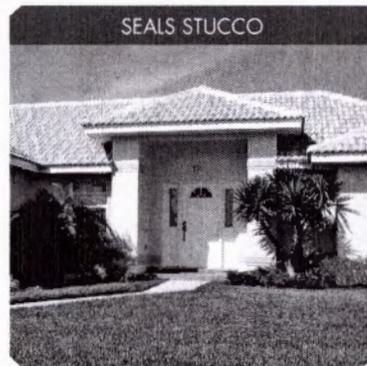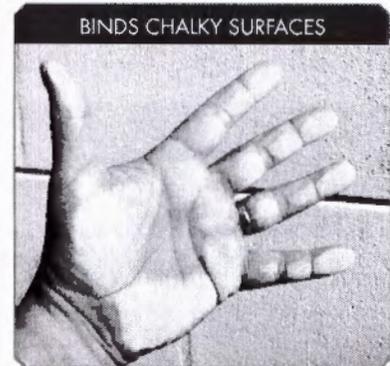

Convenience Products

306 Gandy Rd., Auburndale, FL 33823 USA

www.seal-krete.com

Questions or comments? e-mail: tech@seal-krete.com
or call 1-800-323-7357

THE MOST VERSATILE WATERPROOFING SEALER AVAILABLE

64045-012015-SK